

V - EXD FLOWMONITOR

SUITABLE FOR HAZARDOUS AREA ZONE 1
ACCORDING ATEX DIRECTIVE 2014/34/UE

CERTIFICATION ATEX



V-SS-FSS




V-SS-GSS



V-FSS



V-FA

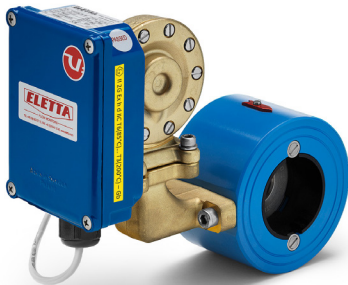

V-GL




V-GSS



Marking: II 2G Ex h d IIC T6(85°C)... T3(200°C) - Gb

Ambient Temperature	Fluid Temperature	Temperature Class
Amb. T. < 75°C	Fluid T. < 85°C	T6
Amb. T. < 75°C	Fluid T. < 100°C	T5
Amb. T. < 75°C	Fluid T. < 135°C	T4
Amb. T. < 75°C	Fluid T. < 200°C	T3

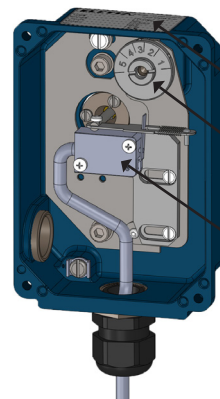

- Case housing internal view
- Rotatable graduated wheel for flow switch set-up
- SPST microswitch 5A @ 250 VAC
Ex II 2G Ex db IIC, T5, T6 - Gb
with 3 meters cable