

To specify upon ordering: S-series



S02/S2-GL
S05/S25-GL



S02/S2-FA
S05/S25-FA



S02/S2-GSS
S05/S25-GSS



S02/S2-FSS
S05/S25-FSS

1. Type of monitor
2. Dimension
3. Measuring range
4. Media:


For water no further info required, go to item 5.

For oil specify type of oil, working temp or viscosity and density and working temperature

NOTE: If no data are given calculation will be done acc to: ISO VG 220@40°C

For gas specify type of gas, working temp and static pressure

5. Flow direction alternative

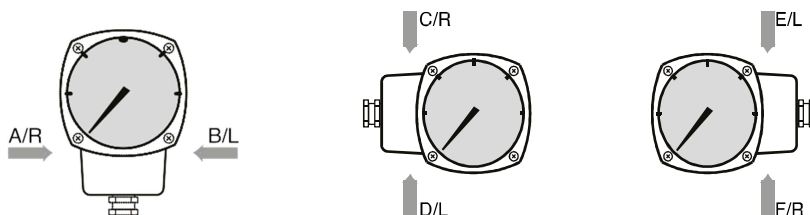

Example: S2-GL, dimension DN15, range 4 – 8 l/min, media water, inst A/R

Options:

- High temp version 120 C (only for S2/S25)
- Goldplated switches (only for S2/S25)
- SPDT switch split contact (only for S2/S25)
- Direct reading dial (eg. l/min, m3/h etc)
- Protection class IP65 (NEMA 4)
- Chemical Nickel plating (for GL only)
- Customized alarm set point
- Mark on tag plate (max. 21 characters)
- ANSI connection
- Rubber parts in other material
- Separate mounting
- Manifold with shut-off valves
- Forced production time